



SPYRO CERAMIC
THE PEOPLE'S CHOICE

TEXTILE
Collection



Suit Different
Aesthetics
And Preferences.

600
X1200MM

IT'S ALL ABOUT US

Spyro is a Group Venture by Spyro Ceramic which is renowned brands of the ceramic industry, bringing together the best of expertise and experience of more than six years. Avalta aims to revolutionize the industry by introducing never-before seen tiles that are sure to raise the bar of grandeur a notch higher.

Exclusivity in design and exquisite finishes defines the Avalta as Best products offerings. Use of quality certified raw materials and innovative - modern technology, Tiles produces in Avalta are the best blend of stylish designs and productive long lasting strength. With the newfangled ideas, we assure and able to create consolidation of Beauty, Style & Quality in Vitrified Tiles which will drive you to the luxuries way...

MISSION

Willingness towards the enhancement of life style and passionately strive to delight every customer of SPYRO by providing innovative and quality products and services as ongoing basis and to become a most sought after brand.

VISION

SPYRO Ceramic is committed to providing technologically-advanced, aesthetically designed, high-strength, premium quality vitrified tiles that satisfy commercial as well residential customer needs in domestic and international markets.



SPYRO CERAMIC
THE PEOPLE'S CHOICE



SPYRO CERAMIC
THE PEOPLE'S CHOICE

TEXTILE

Collection

SIZE

600x1200mm

FINISH
Carving

Embrace the charm of silk with
Imitation tile the smooth, silky texture
Of this timeless cotton creates an
Atmosphere of opulence and refinement.





SPYRO CERAMIC

THE PEOPLE'S CHOICE

CARVING FINISH



ACTURE DARK BROWN



ACTURE DARK
BROWN

600
X1200MM

FINISH
CARVING






ACTURE LIGHT BROWN



**ACTURE LIGHT
BROWN**


**600
X1200MM**

FINISH
CARVING

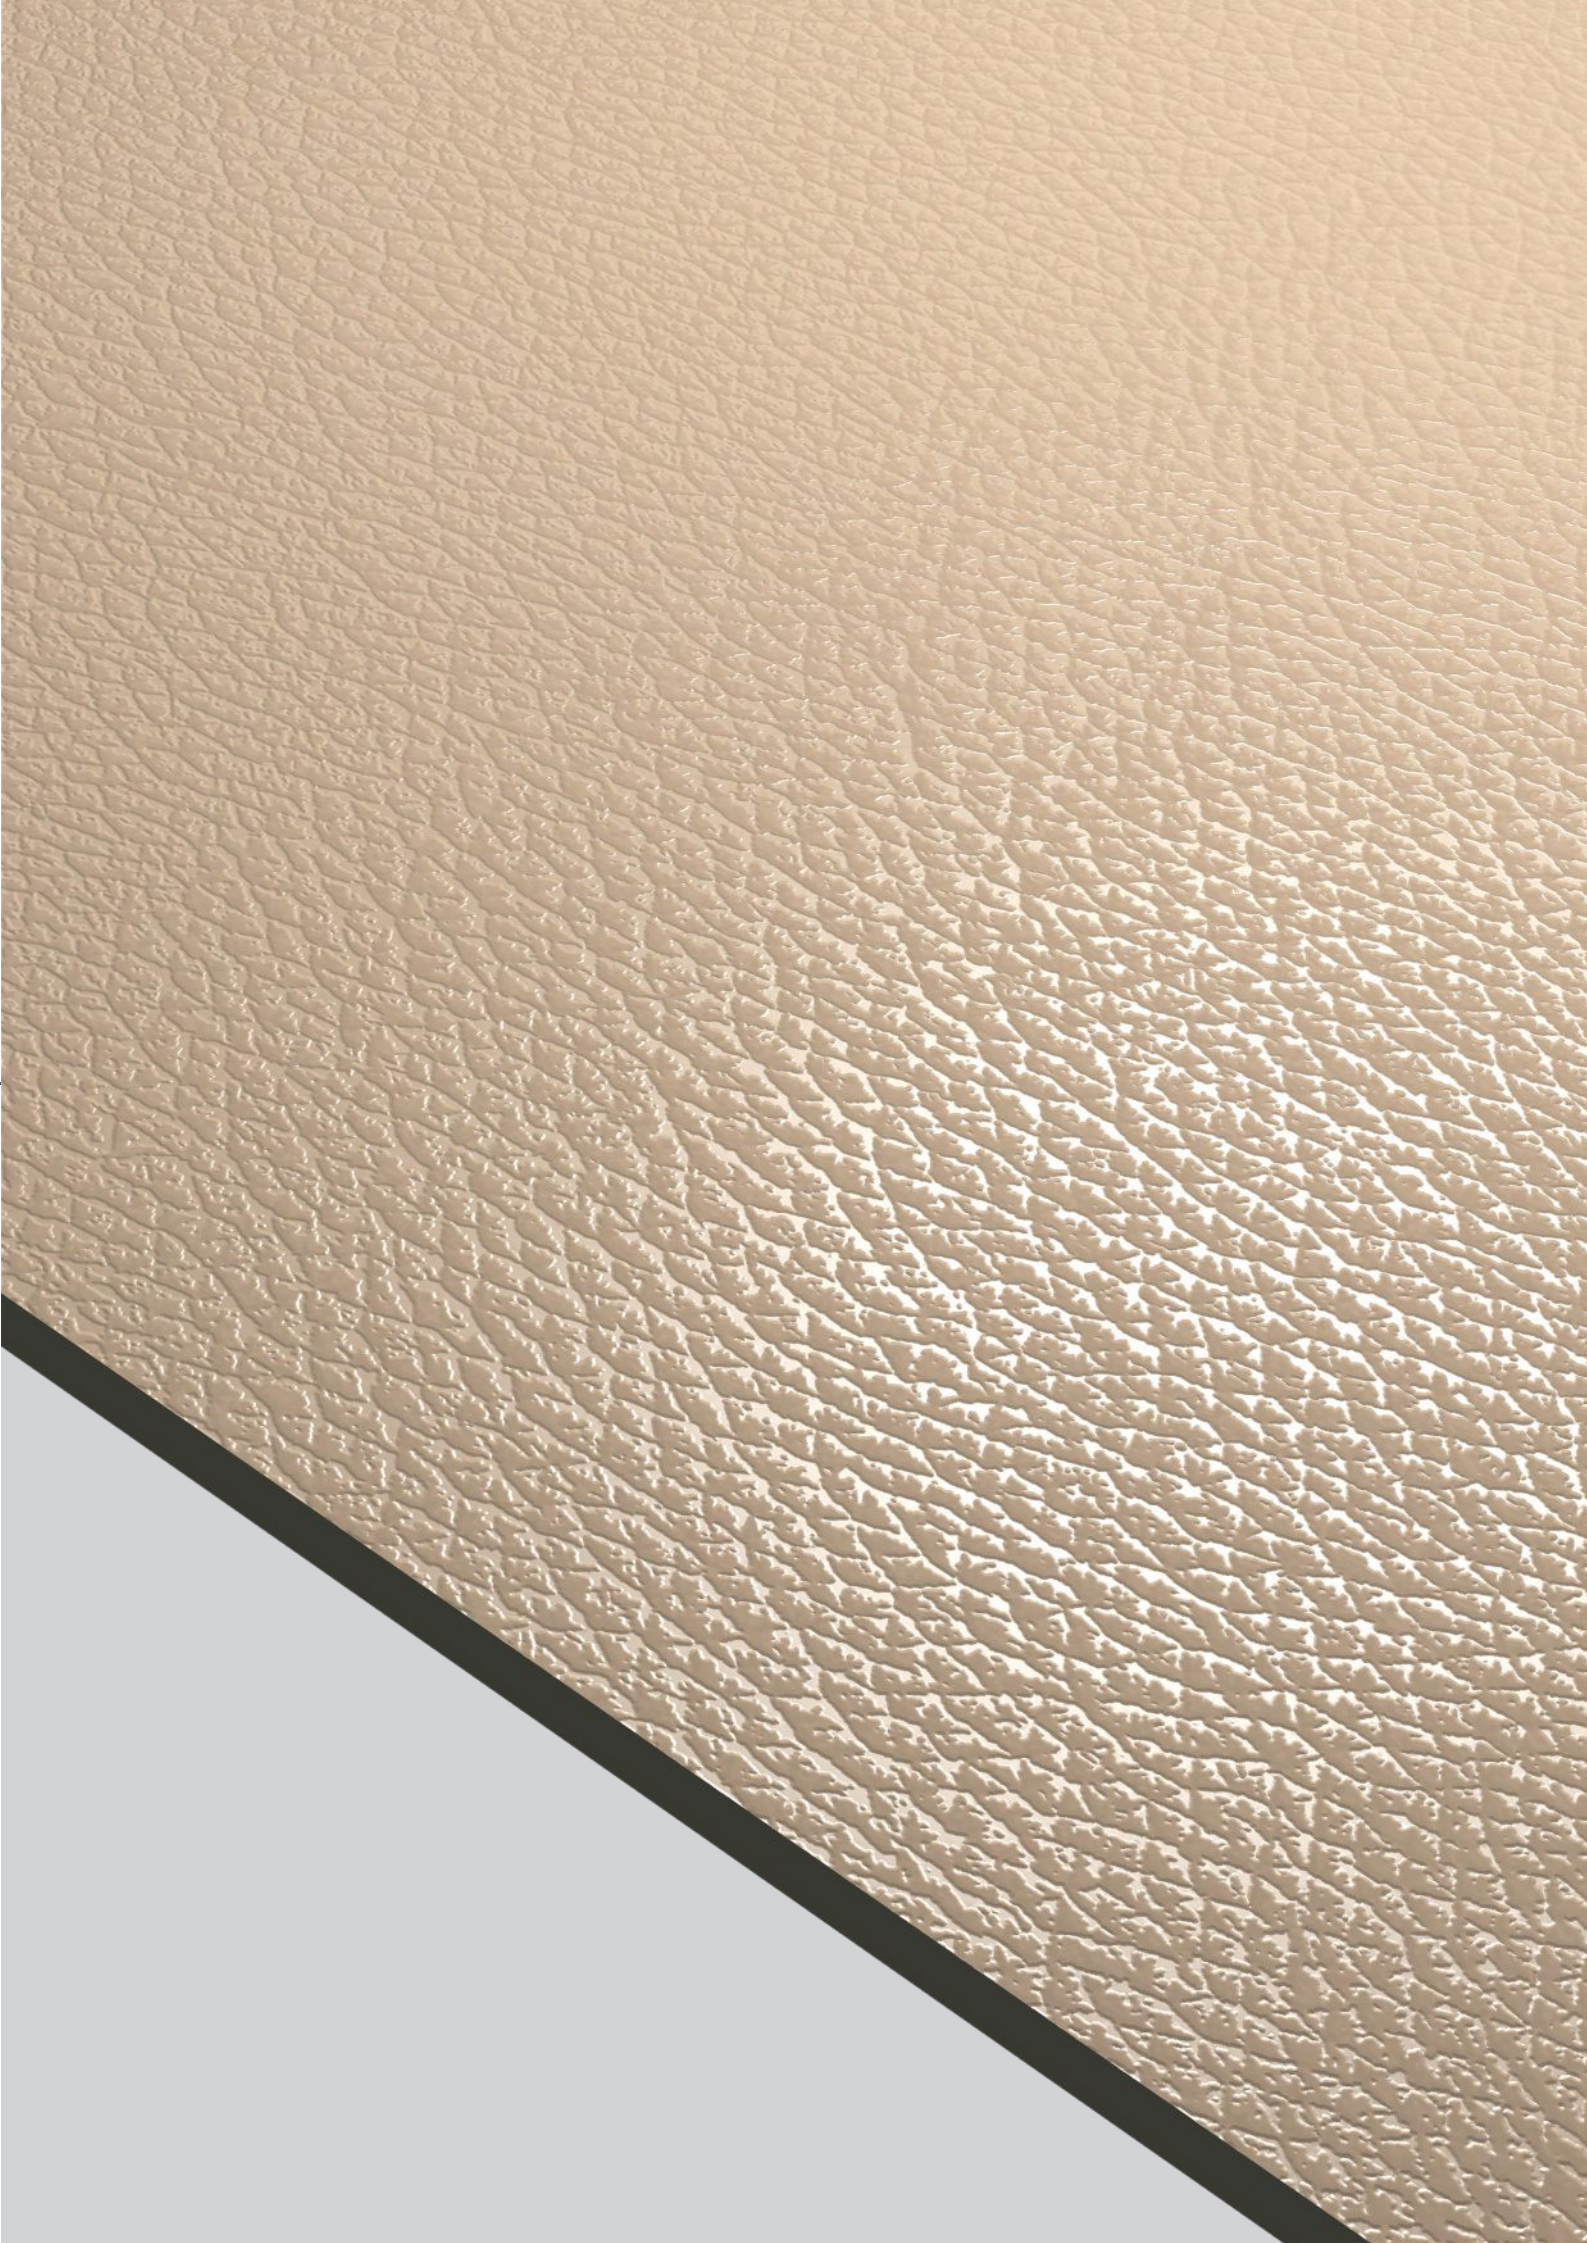




ACTURE DARK GREY

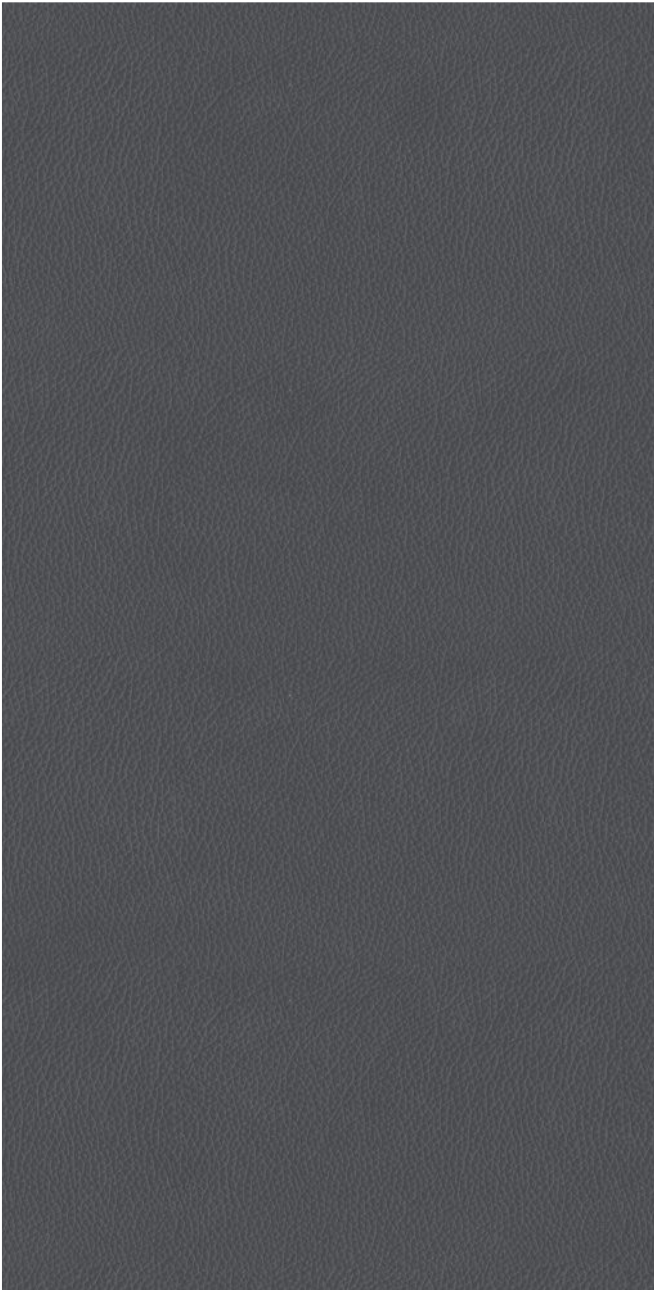

**ACTURE DARK
GREY**


600
X1200MM

FINISH
CARVING

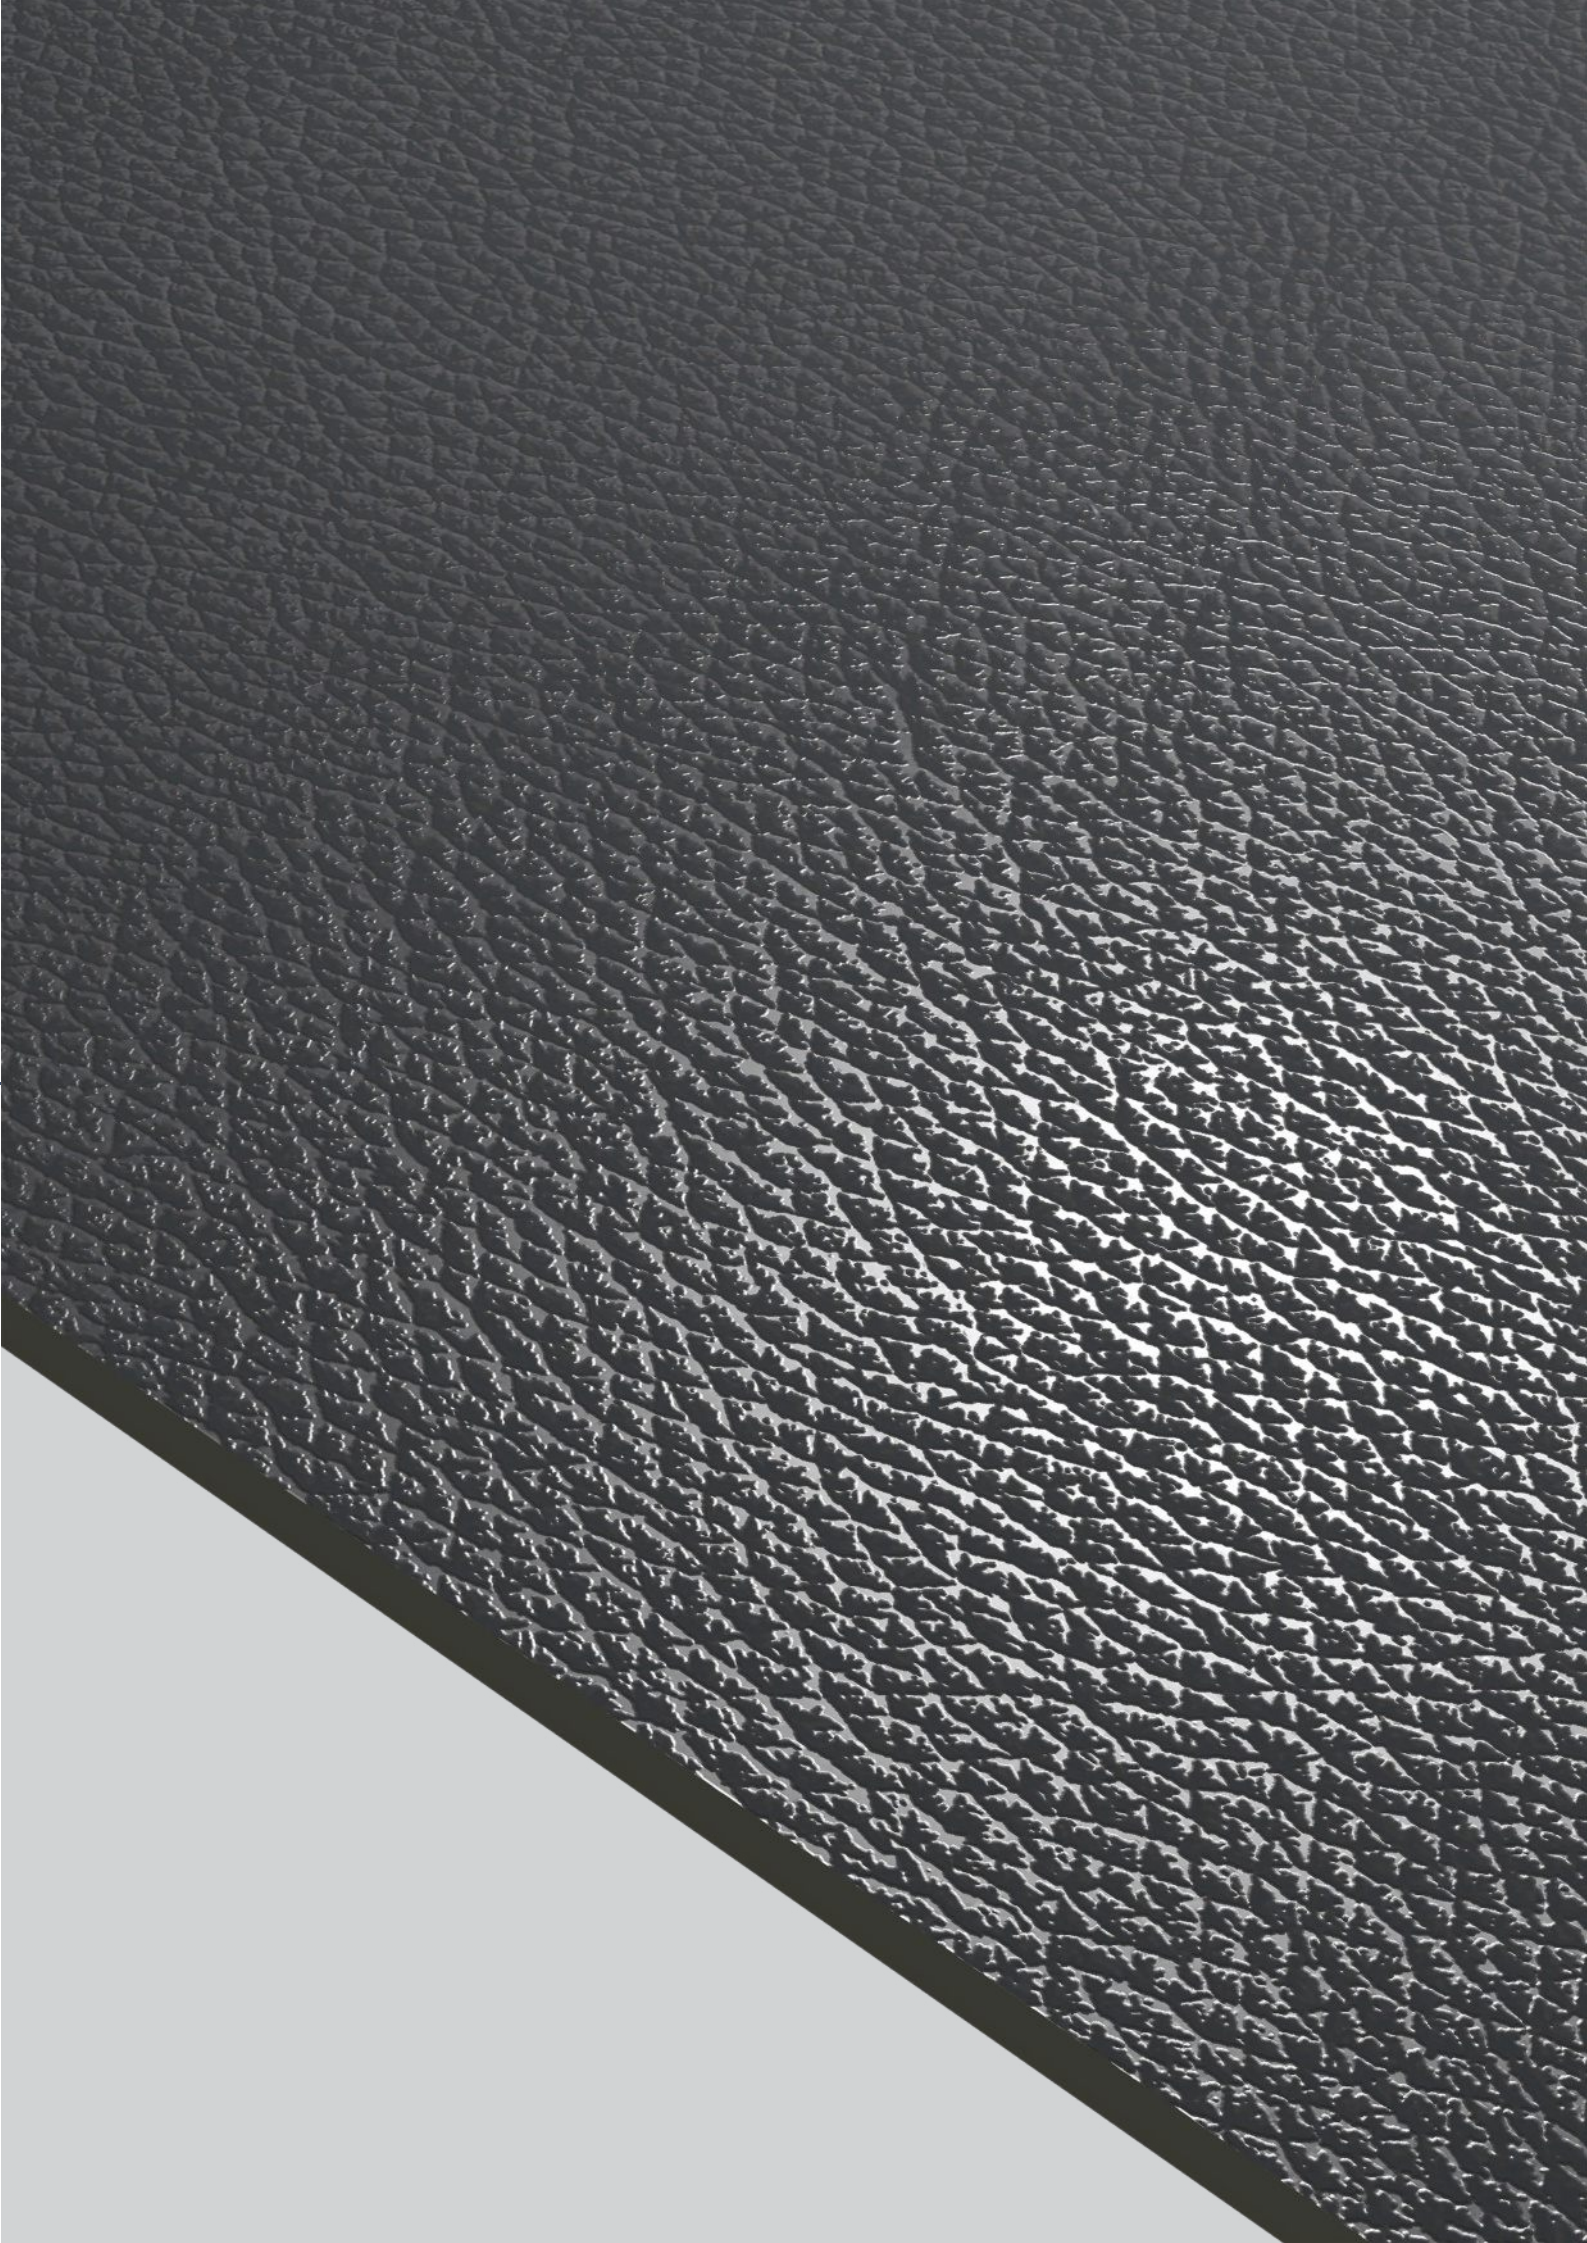



ACTURE LIGHT GREY

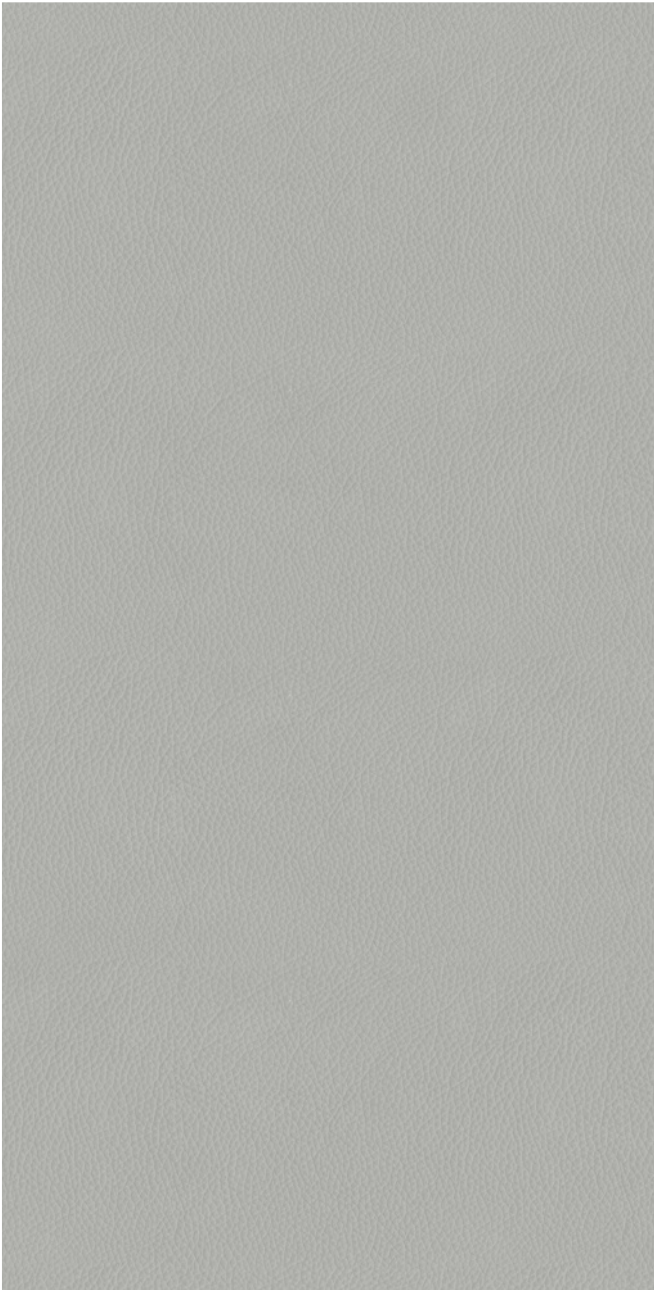

**ACTURE LIGHT
GREY**


600
X1200MM

FINISH
CARVING





BORIC DARK GREY

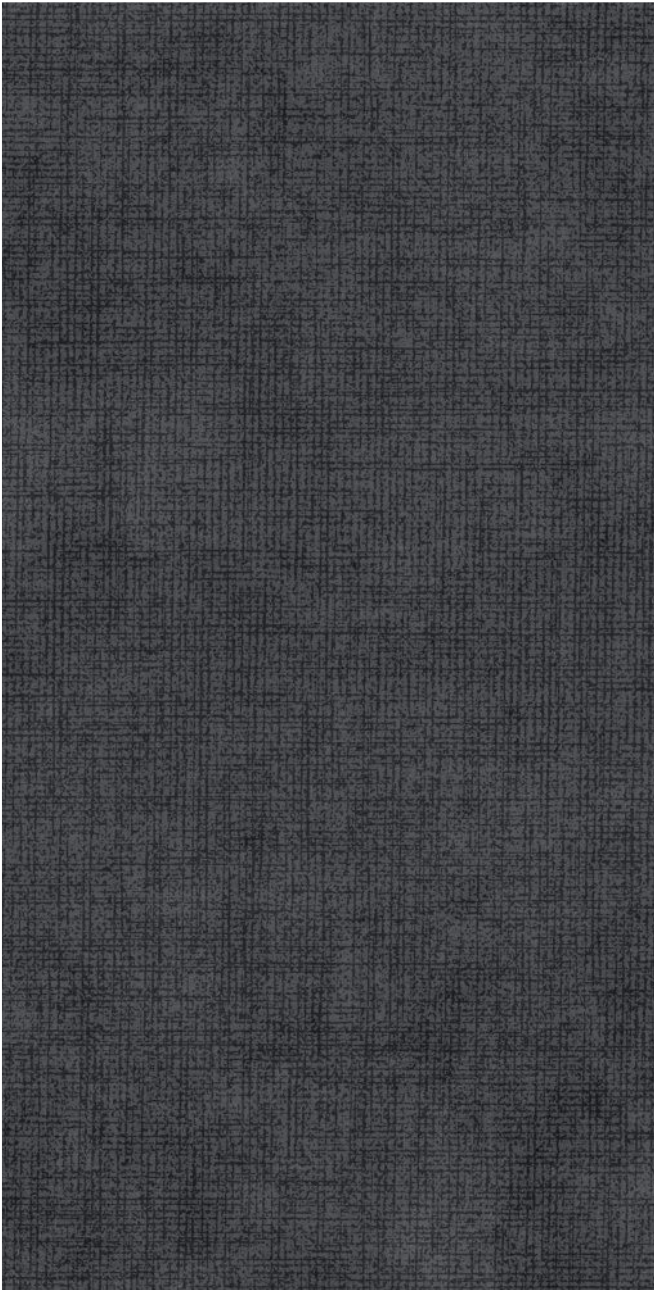

**BORIC DARK
GREY**


600
X1200MM

FINISH
CARVING






BORIC LIGHT GREY

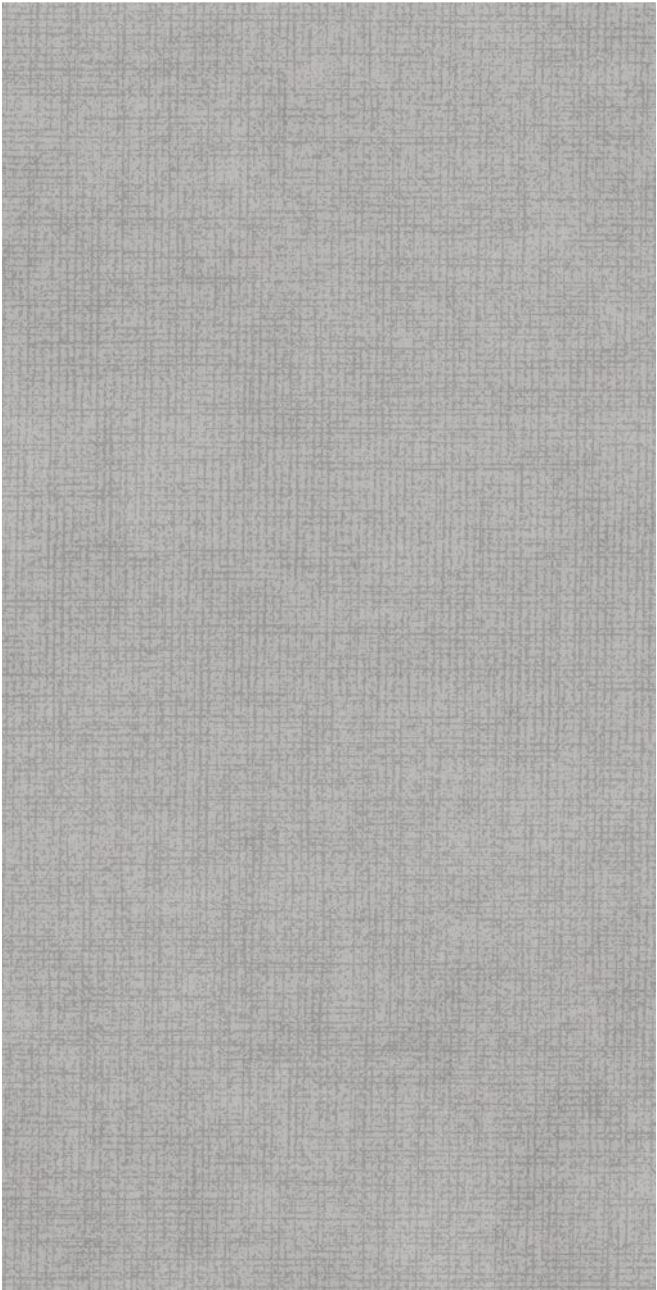

**BORIC LIGHT
GREY**

**600
X1200MM**

FINISH
CARVING

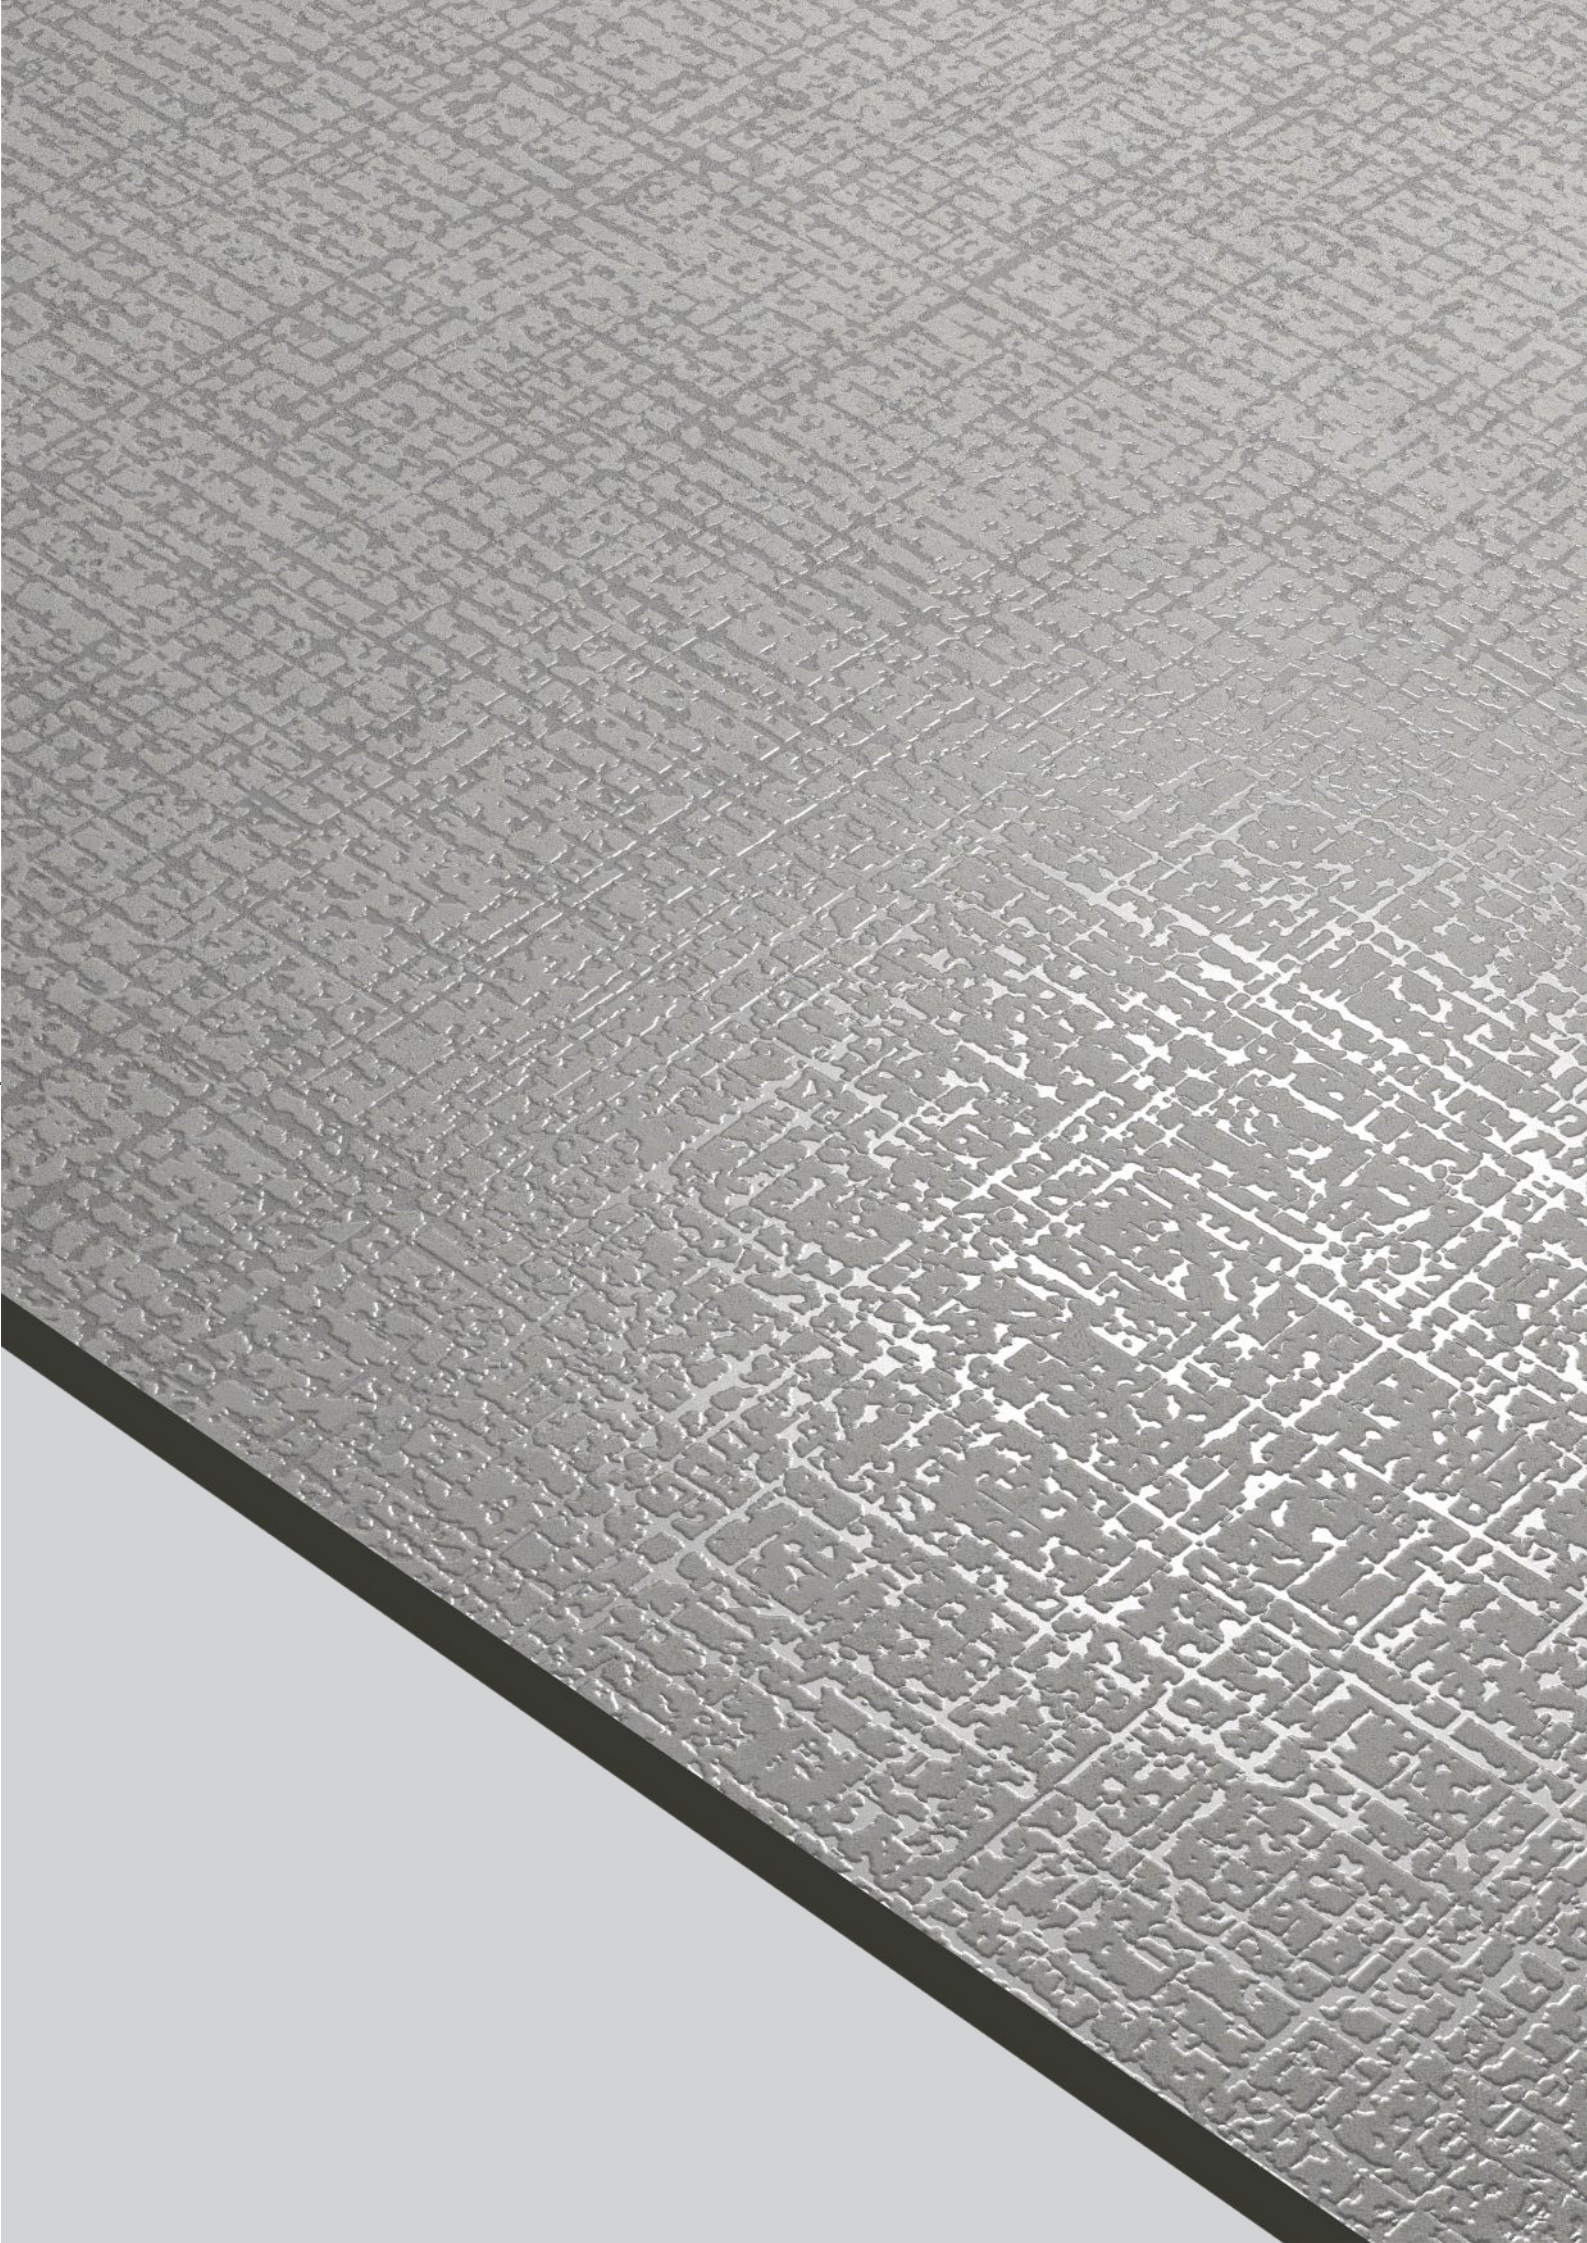



CULTIVE DARK BLUE



**CULTIVE DARK
BLUE**


**600
X1200MM**

FINISH
CARVING





CULTIVE LIGHT BLUE

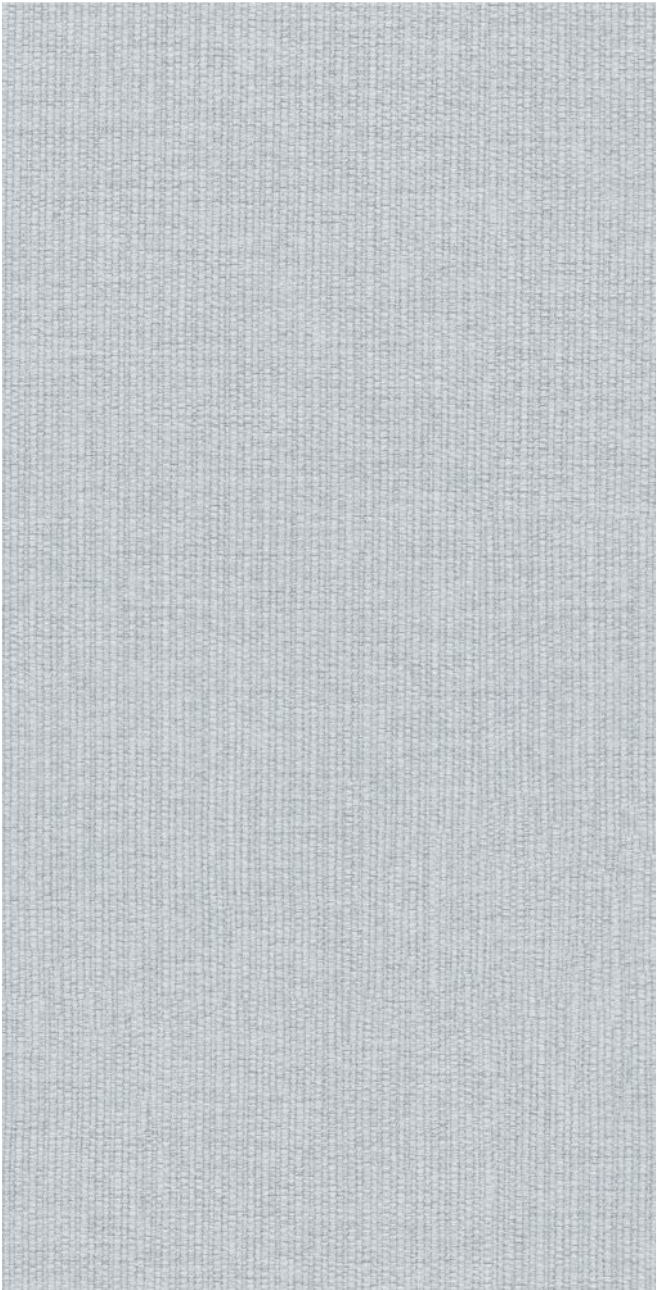

**CULTIVE LIGHT
BLUE**


**600
X1200MM**

FINISH
CARVING





CULTIVE DARK GREY

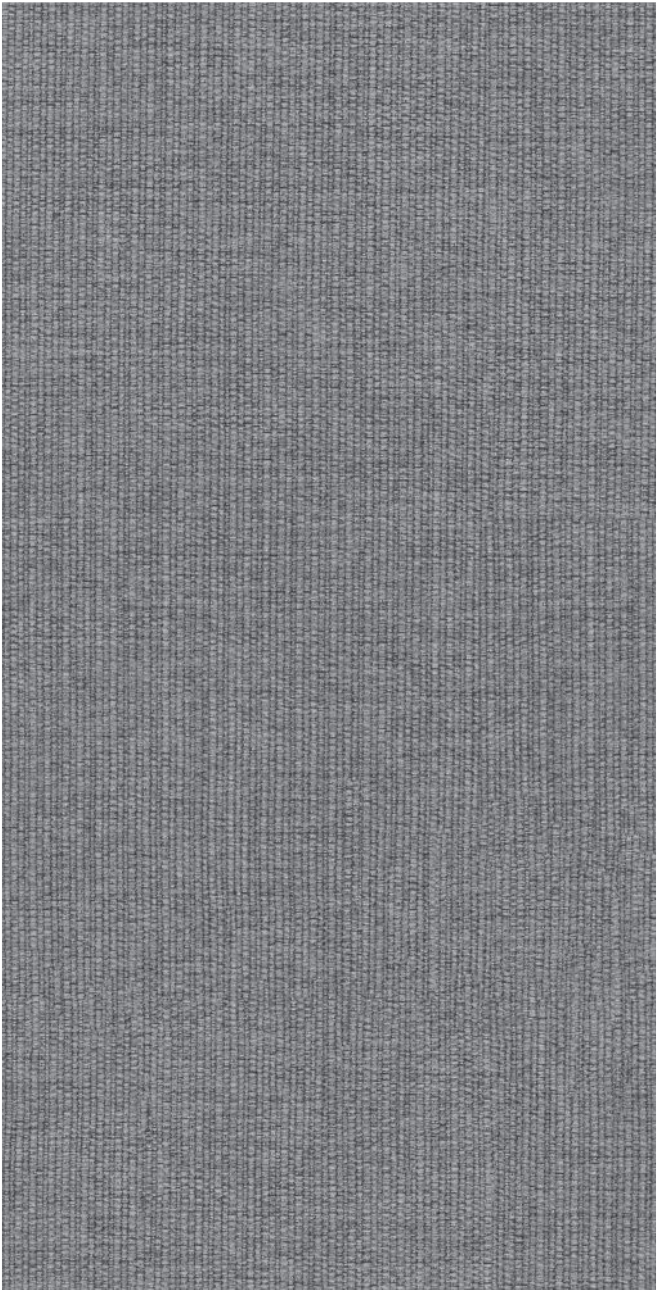

**CULTIVE DARK
GREY**


600
X1200MM

FINISH
CARVING





CULTIVE LIGHT GREY

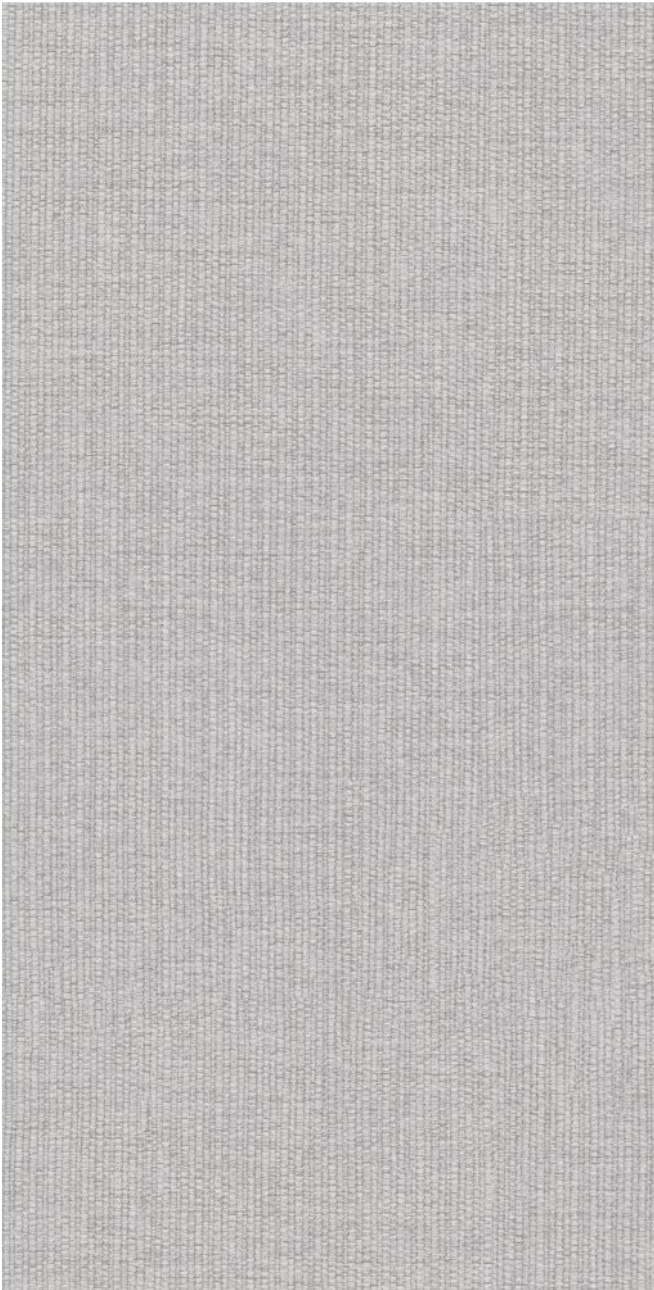

**CULTIVE LIGHT
GREY**

600
X1200MM

FINISH
CARVING





NERALIS DARK BEIGE



**NERALIS DARK
BEIGE**


600
X1200MM

FINISH
CARVING





NERALIS LIGHT BEIGE

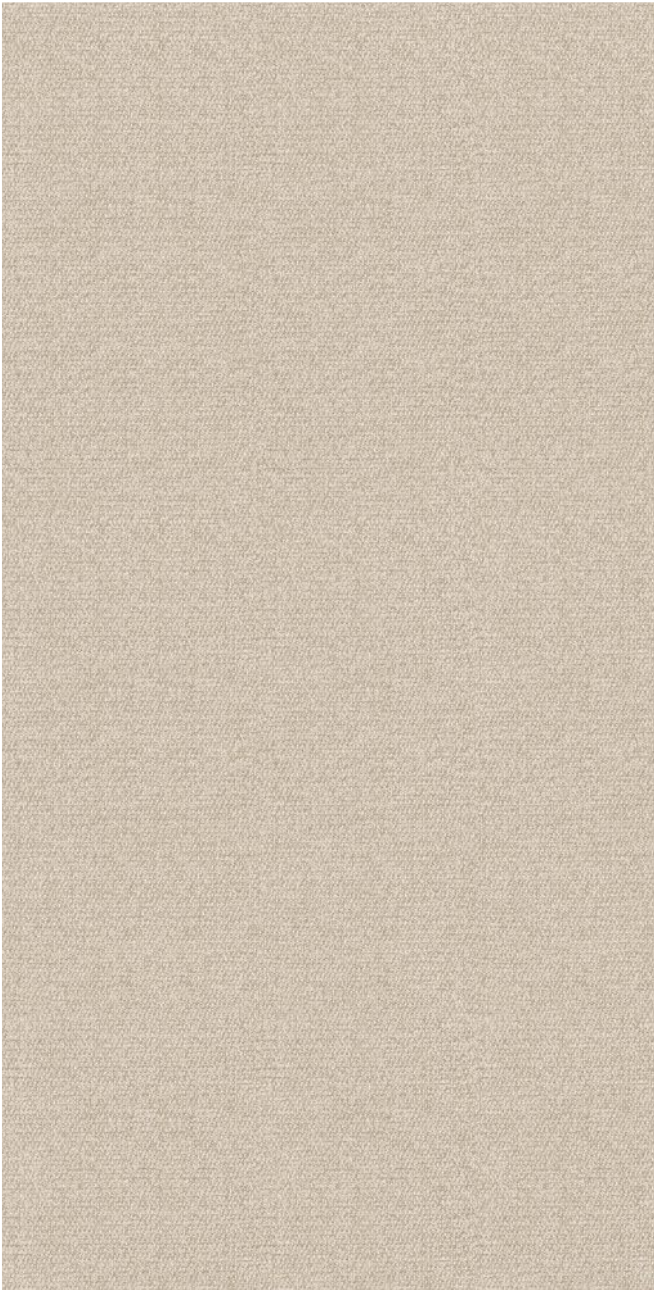

**NERALIS LIGHT
BEIGE**


600
X1200MM

FINISH
CARVING





NERALIS DARK CHOCO

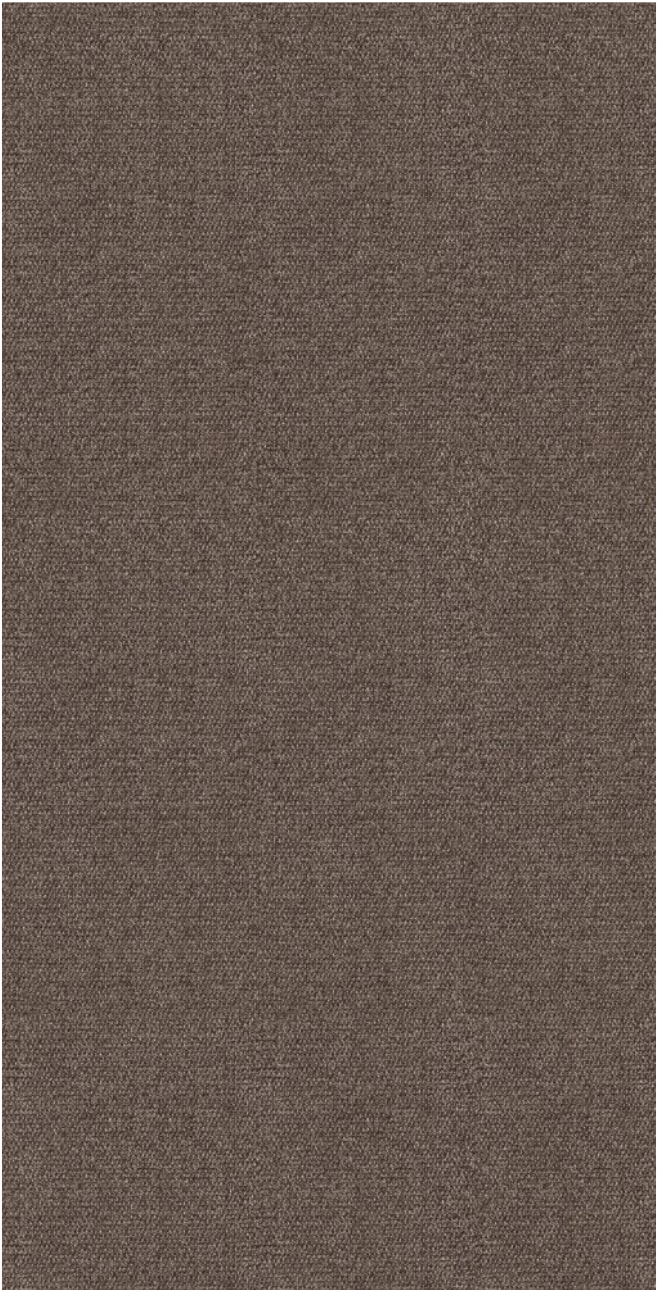

**NERLIS DARK
CHOCO**


600
X1200MM

FINISH
CARVING





NERLIS LIGHT CHOCO

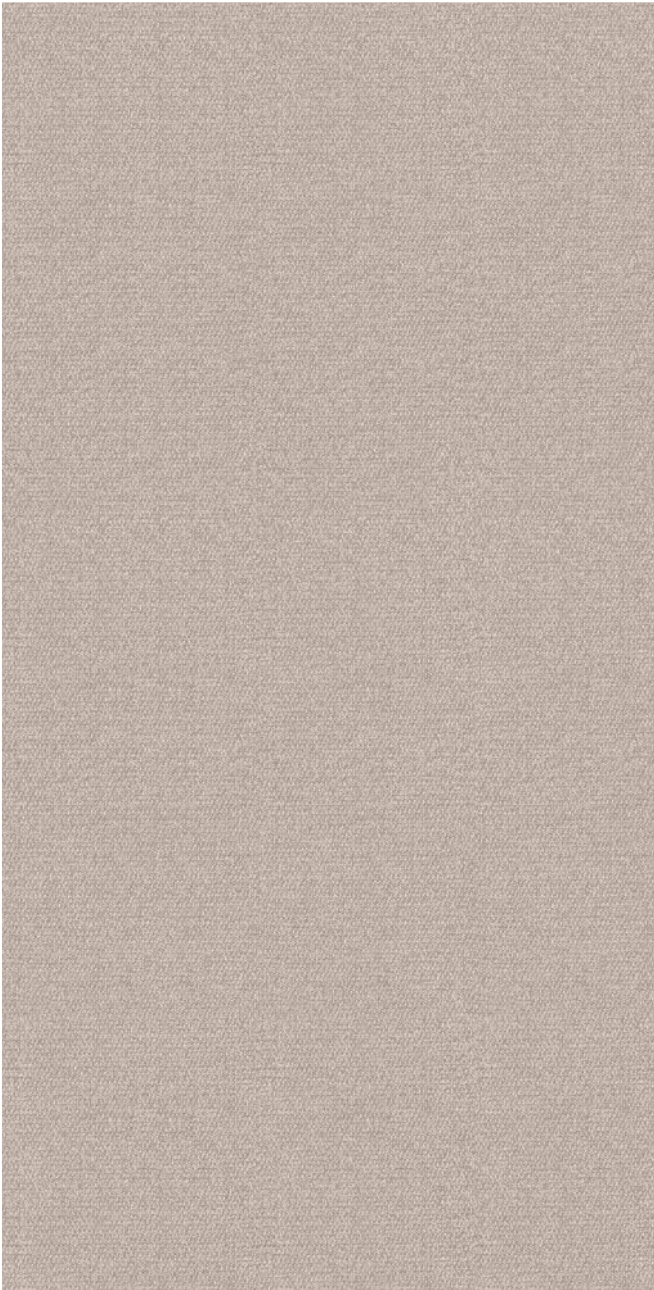

**NERLIS LIGHT
CHOCO**

600
X1200MM

FINISH
CARVING



SLERIOS DARK BEIGE



SLERIOS DARK BEIGE


600
X1200MM

FINISH
CARVING





SLERIOS LIGHT BEIGE

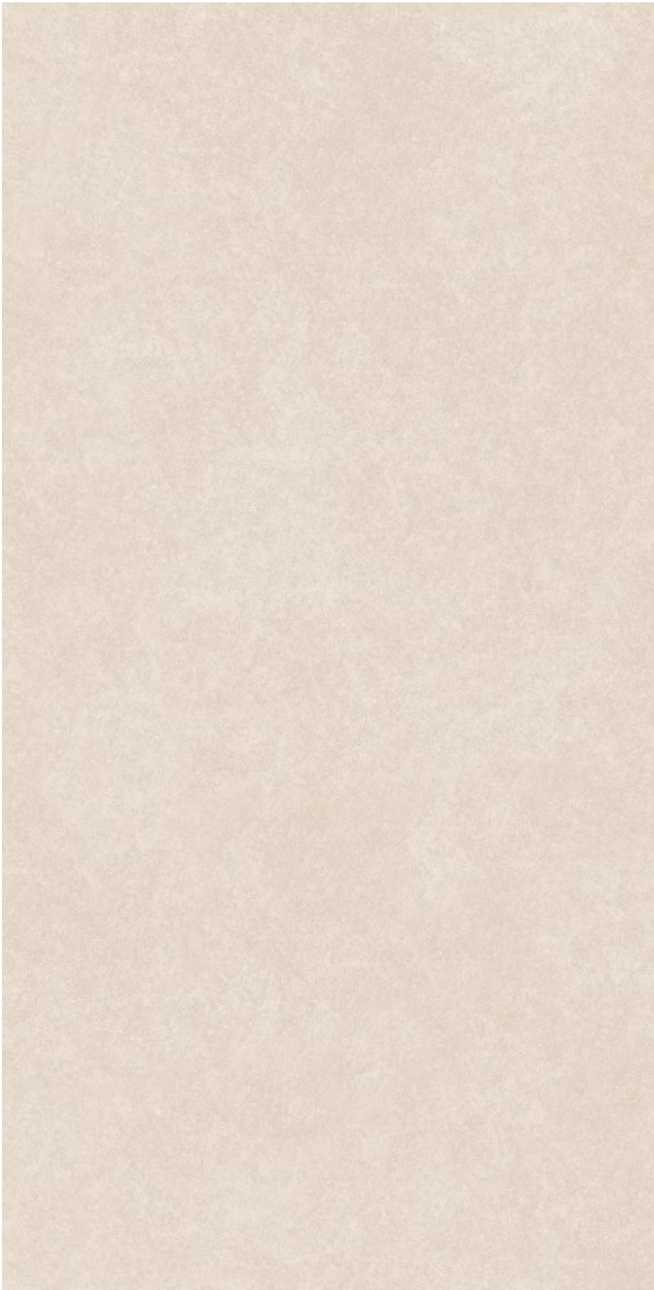


**SLERIOS LIGHT
BEIGE**

600
X1200MM

FINISH
CARVING



SLERIOS DARK GREY

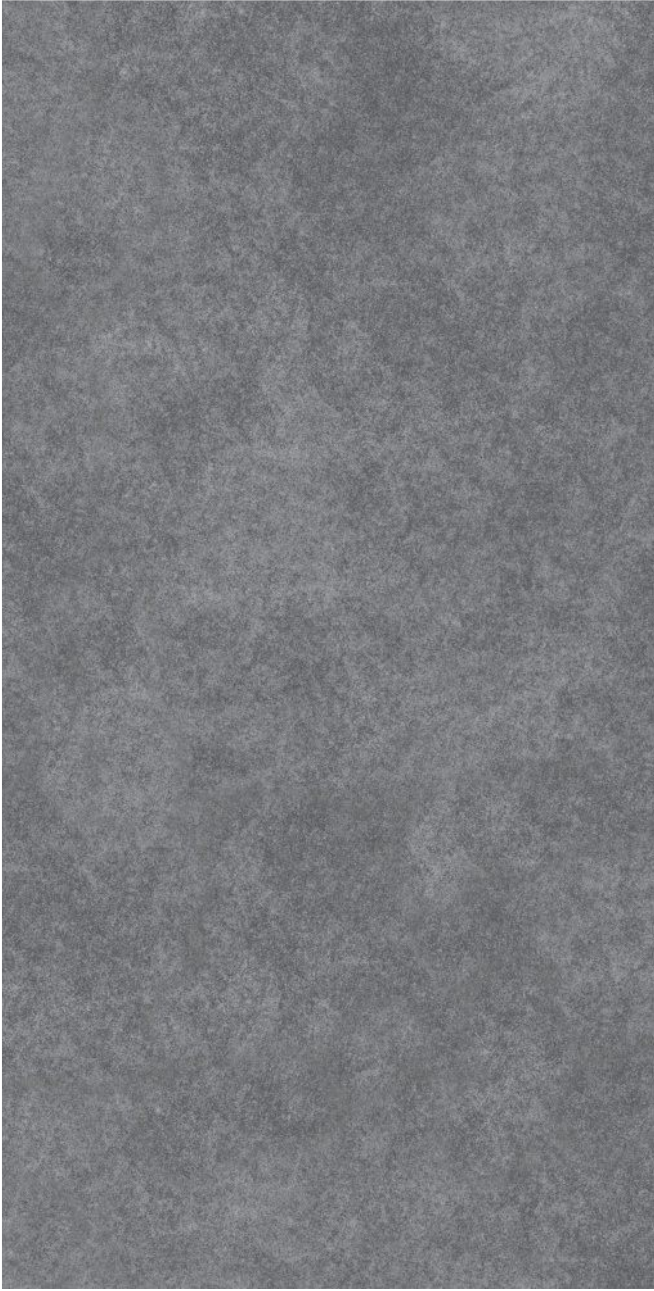


**SLERIOS DARK
GREY**

600
X1200MM

FINISH
CARVING



SLERIOS LIGHT GREY

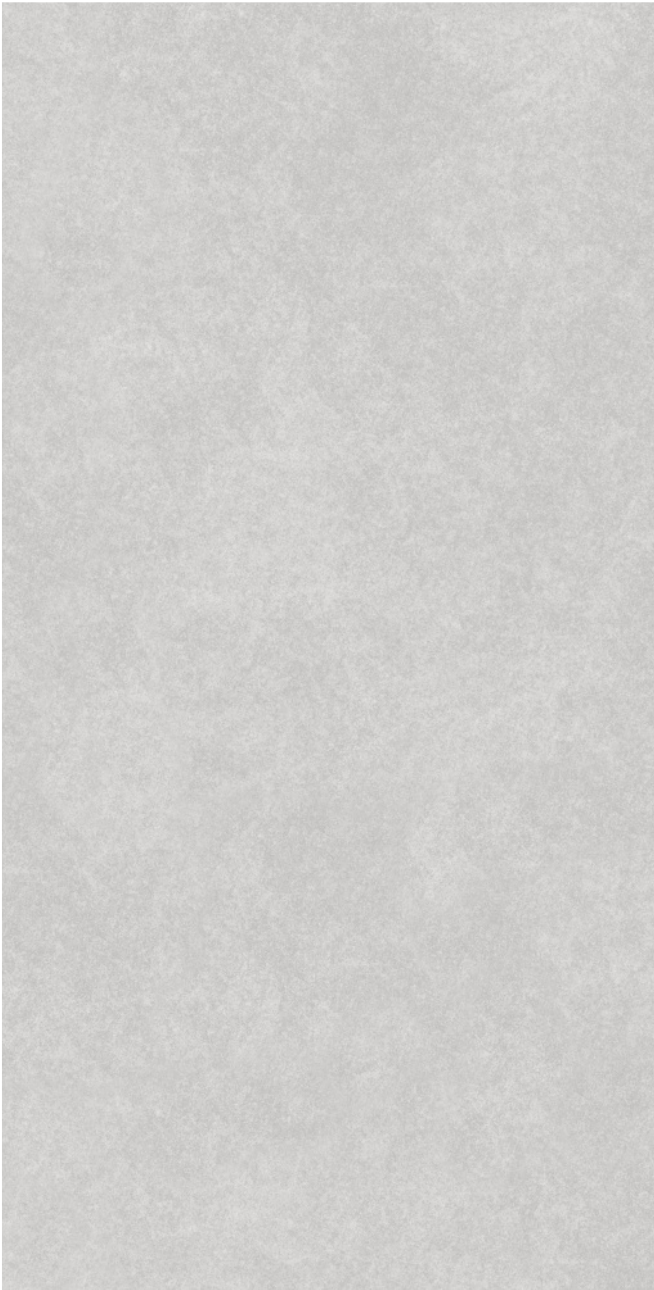

**SLERIOS LIGHT
GREY**

600
X1200MM


FINISH
CARVING



STREN DARK BEIGE



SPYRO CERAMIC
THE PEOPLE'S CHOICE

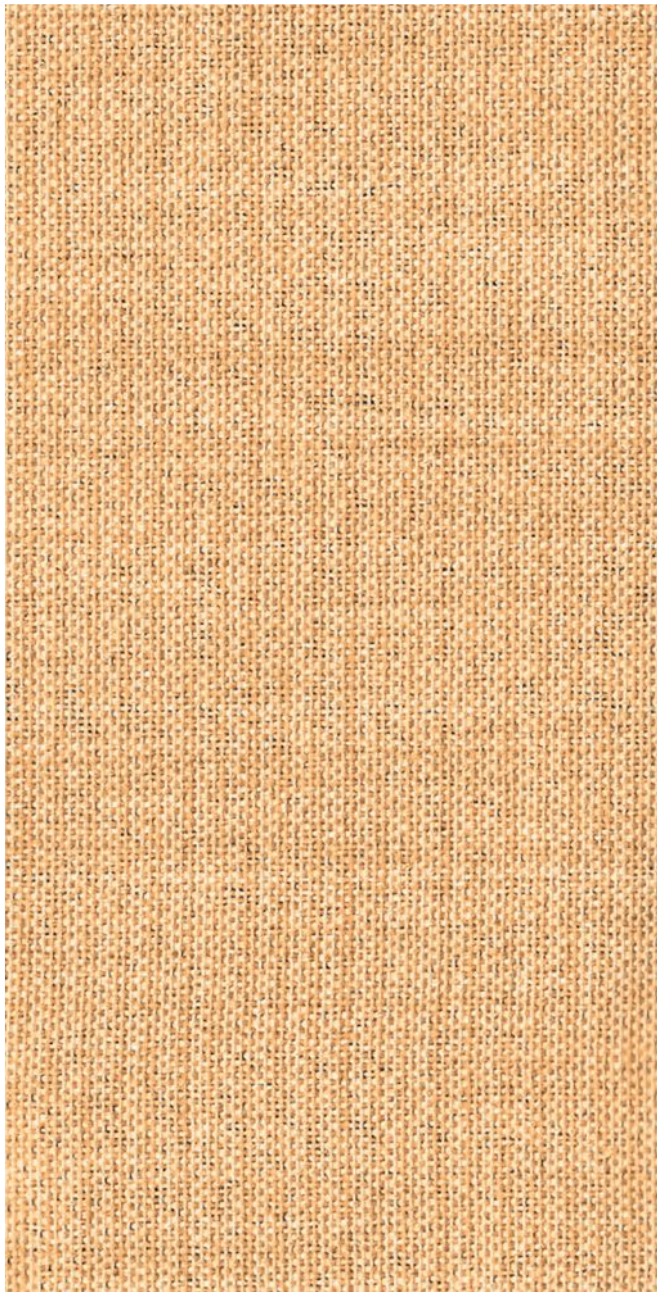

STREN DARK
BEIGE

600
X1200MM

FINISH
CARVING

TEXTILE
Collection



IMPACT
RESISTANCE



HIGH
STRENGTH



ZERO
MAINTENANCE




LOW WATER
ABSORPTION






STREN LIGHT GREY

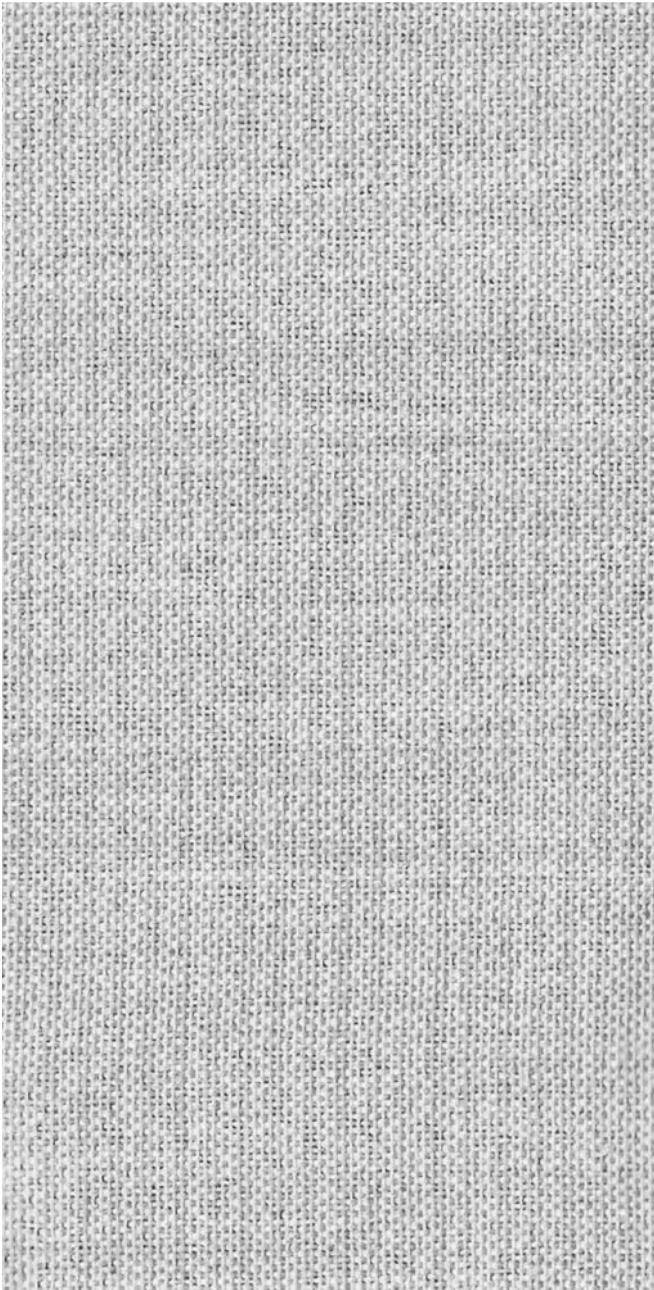

**STREN LIGHT
GREY**

**600
X1200MM**

FINISH
CARVING

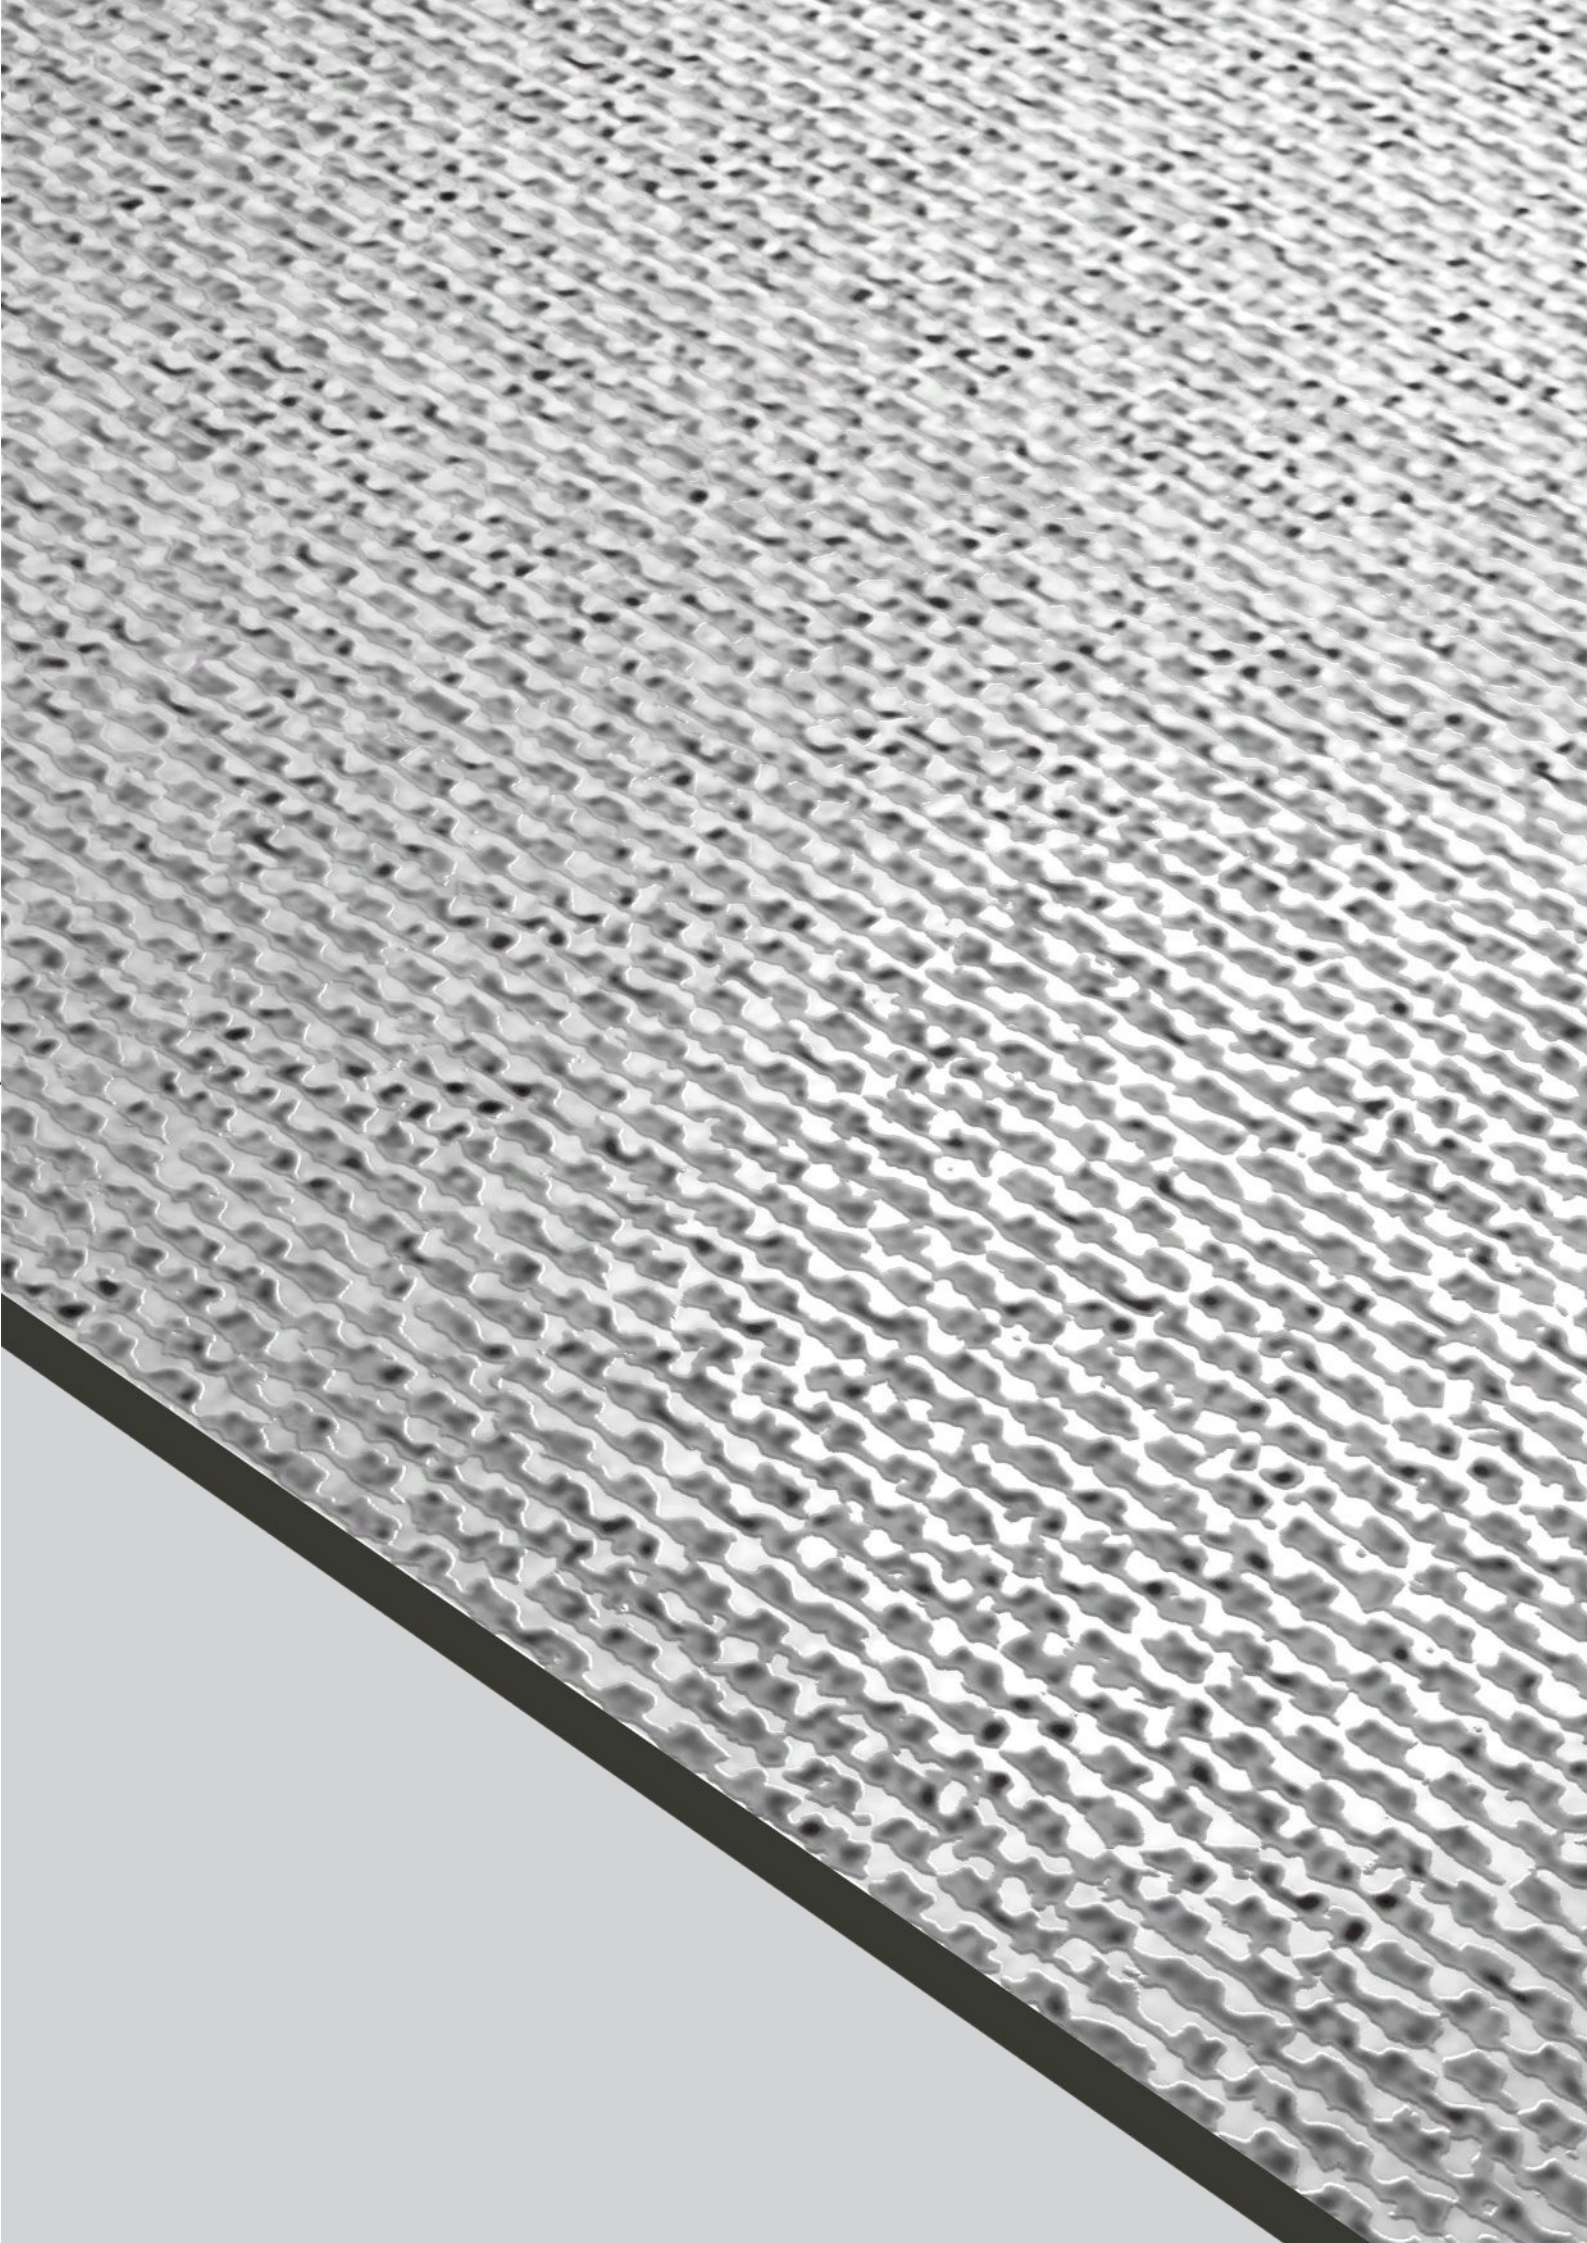

Technical Specifications.

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP BIa	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF GVT / PGVT	TEST METHOD
REGULATORY PROPERTIES				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color dierence	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER
STRUCTURAL PROPERTIES				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
Modulus Of Rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
Surface abrasion resistance	As per mfg	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	Min. 5	EN 101
THERMO HYDROMETRIC PROPERTIES				
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion(COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.
Lead & Cadmium given o by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15

Packing Details.

SR. NO.	PRODUCT	NOMINAL SIZE	TILES PER BOX	COVERAGE AREA
1	VITRIFIED TILES	600 x 1200 mm	2	1.44 Sq. Mtr.

Note: •Colour Shown are as accurate as the limitations of the printing process will allow. •Prospective customers are advised to inspect a sample of the tile before ordering. • Every effort has been made to ensure the accuracy of the information given. •However, the company reserve the right to change the specifications without prior notice. •Sometime variations in shade or size being inherent to ceramic industry may occur. •Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



SPYRO CERAMIC
THE PEOPLE’S CHOICE



SPYRO CERAMIC
THE PEOPLE'S CHOICE

spyroceramic@gmail.com | +918758844000